

*Complement
your purchase
with these
fine accessories
also from
GINGER®:*

*Towel Bars
Towel Rings
Toilet Tissue Holders
Hooks
Soap Dishes
Tumbler Holders
Toiletry Shelves
Grab Bars
Mirrors
Lights
Bud Vases
Hotel Shelves
Shower Curtain Rods
Soap & Bottle Baskets
Cabinet Hardware*

LIGHT

INSTALLATION
INSTRUCTIONS

for
CHELSEA
DOUBLE LIGHT

GINGER®


460-N Greenway Industrial Drive
Fort Mill SC 29708

gingerco.com

GINGER®

Chelsea Double Light

MODEL No. 1182

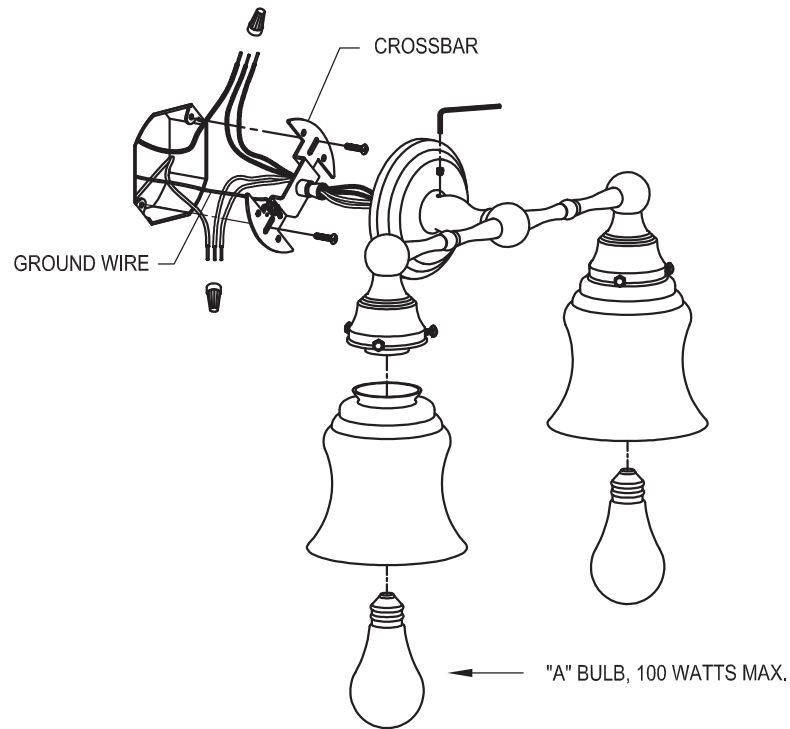

Installation Instructions:

These lights should be installed by a licensed electrical contractor.

POWER REQUIREMENTS: 120 Volts, 60 Cycles

NOTE: *This light may be inverted for uplighting.*

SAFETY: TO PREVENT ELECTRICAL SHOCK, BE SURE THAT POWER IS OFF BEFORE STARTING INSTALLATION.

INSTALLATION:

1. Provide the required wiring to the wall-mounted electrical box. The electrical box should be flush in the wall.
2. Mount crossbar to the electrical box. The crossbar should be flat against the wall with the spindle facing away from the wall.
3. Connect house ground wire to the crossbar with attached ground screw.
4. Feed the light fixture wires through the rosette then through the center hole of the crossbar.
5. Connect the white wire of the fixture to the house neutral wire with a wirenut.
6. Connect the Black wire of the fixture to the house hot wire with a wirenut.
7. Slide the fixture over the spindle of the crossbar until it is flush against the wall. Secure the fixture by tightening the set screw with the provided wrench. Make sure the wires are not pinched during this process.
8. Position glass shade onto fixture and tighten thumb screws.
9. Install light bulbs.

GINGER®