

Models 6123/6122, 6123A/6122A, 6623/6622

PRO-FIT® 3672 TFS

Rectangular Whirlpool or Bathtub



Features



- 71-1/4" x 35-1/2" x 23" Rectangular alcove whirlpool or bathtub
- Integral apron and tile flange
- Six powerful Ultra-Swirl jets
- Dual air knobs for total jet control
- Limited One-Year Warranty
- Available in standard colors: white, almond, biscuit and bone



Model 6123A
(Shown with trim upgrade and Lift and Turn drain)



Options

Lift and Turn Drain

| Model # | Description | | Model # | Description | |
|---------|-------------------|---|---------|-----------------------|---|
| PF1320 | Polished Chrome |  | PF1340 | Access panel on apron |  |
| PF1321 | Everbrass (PVD) | | | | |
| PF1322 | Brushed Nickel | | | | |
| PF1323 | Oil Rubbed Bronze | | | | |

Whirlpool Option

Metal Trim

| Model # | Description | | Model # | Description | |
|---------|-------------------|---|---------|----------------------|---|
| PF1335 | Polished Chrome |  | SWP151 | In-line Water Heater |  |
| PF1336 | Everbrass (PVD) | | | | |
| PF1337 | Brushed Nickel | | | | |
| PF1338 | Oil Rubbed Bronze | | | | |



MADE IN USA




Models 6123/6122, 6123A/6122A, 6623/6622

PRO-FIT® 3672 TFS

Rectangular Whirlpool or Bathtub




Specifications

| Model # | Description | Codes/Standards |
|---------|---|---|
| 6123 | 71-1/4" x 35-1/2" x 23" TFS Lefthand rectangular whirlpool without panel |    |
| 6122 | 71-1/4" x 35-1/2" x 23" TFS Righthand rectangular whirlpool without panel | |
| 6123A | 71-1/4" x 35-1/2" x 23" TFS Lefthand rectangular whirlpool with access panel | |
| 6122A | 71-1/4" x 35-1/2" x 23" TFS Righthand rectangular whirlpool with access panel | |
| 6623 | 71-1/4" x 35-1/2" x 23" TFS lefthand rectangular bath | |
| 6622 | 71-1/4" x 35-1/2" x 23" TFS righthand rectangular bath | |

| Specification | Description | Specification | Description |
|-------------------------|--|----------------------|--|
| Material | Acrylic, fiberglass reinforced | Number of Jets | 6 |
| Construction | Self-contained, pre-plumbed whirlpool bath mounted on a pre-leveled base | Water Capacity | 38 gal. (min.) / 52 gal. (max.) |
| Pump Motor | Single speed, 120 volt, 60 HZ, 5.8 amp, premounted | Floor Loading Weight | 47 lbs. / sq. ft. (229 kg/m ²) |
| Electrical Requirements | 120 volt, 15 AMP, GFCI protected circuit | Shipping Weight | whirlpool - 170 lbs. bathtub - 150 lbs. |
| On/Off Control | Air Switch | Warranty | Limited One Year |

Technical Information

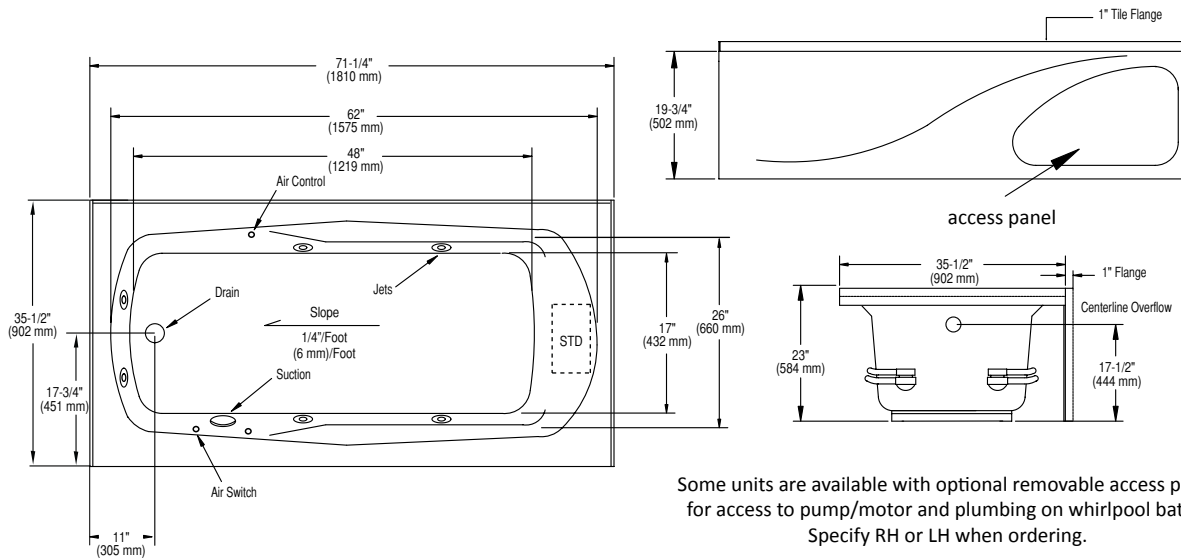

Some units are available with optional removable access panel for access to pump/motor and plumbing on whirlpool baths. Specify RH or LH when ordering.

Notes: Due to integral tile flange, a nailing flange is not available on this unit.

Measurements may vary 1/4" (+/-)

Install this product according to the installation guide.

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.

Please visit our website to view IAPMO certification information – www.mansfieldplumbing.com



MADE IN USA